



① Board dimensions (top view)  
Scale 3:1

② Connector callouts (bottom view)  
Scale 3:1

③ Isometric view  
Scale 2:1

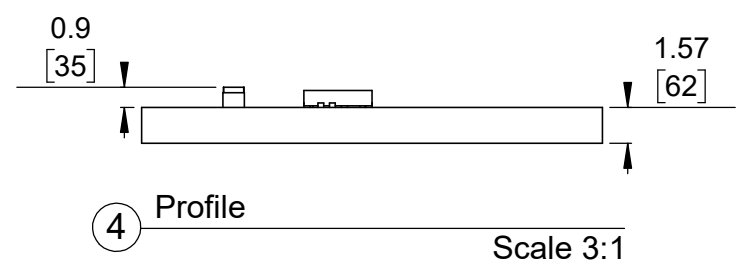

④ Profile  
Scale 3:1



⑤ Actual size  
Scale 1:1

- ①. Intended for #2 and M2 screws.
- ②. Intended for #6 screws and 8 AWG or thinner wire.
- ③. Intended for #2 and M2 screws and 12 AWG or thinner wire.
- 4. Grid lines indicate 2.54 mm [100 mil] spacing.
- 5. To get the specified scale, select 100% in print settings.
- 6. Drill location tolerance:  $\pm 0.1$  [ $\pm 5$ ].
- 7. Board edge tolerance:  $\pm 0.3$  [ $\pm 10$ ].

<a href="https://www.pololu.com/product/2452">https://www.pololu.com/product/2452</a>	
Name: ACS711EX Current Sensor Carrier	Item number: 2452, 2453
Drawing date: 30 September 2022	Dev code: cs02b
Units: mm [mil]	Material: mixed

