

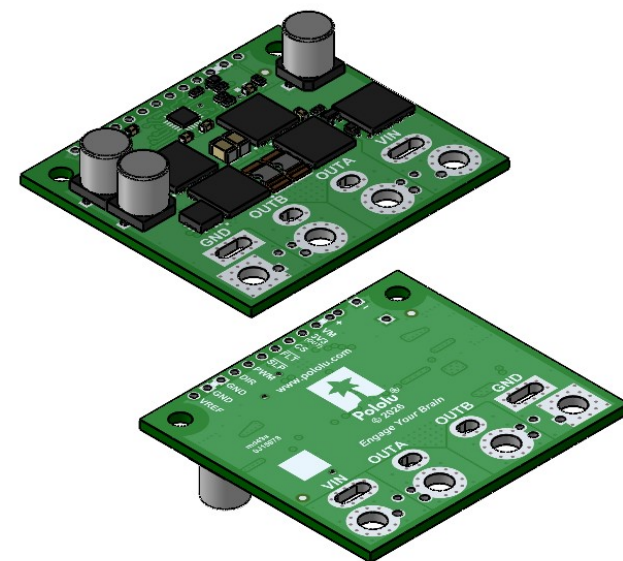


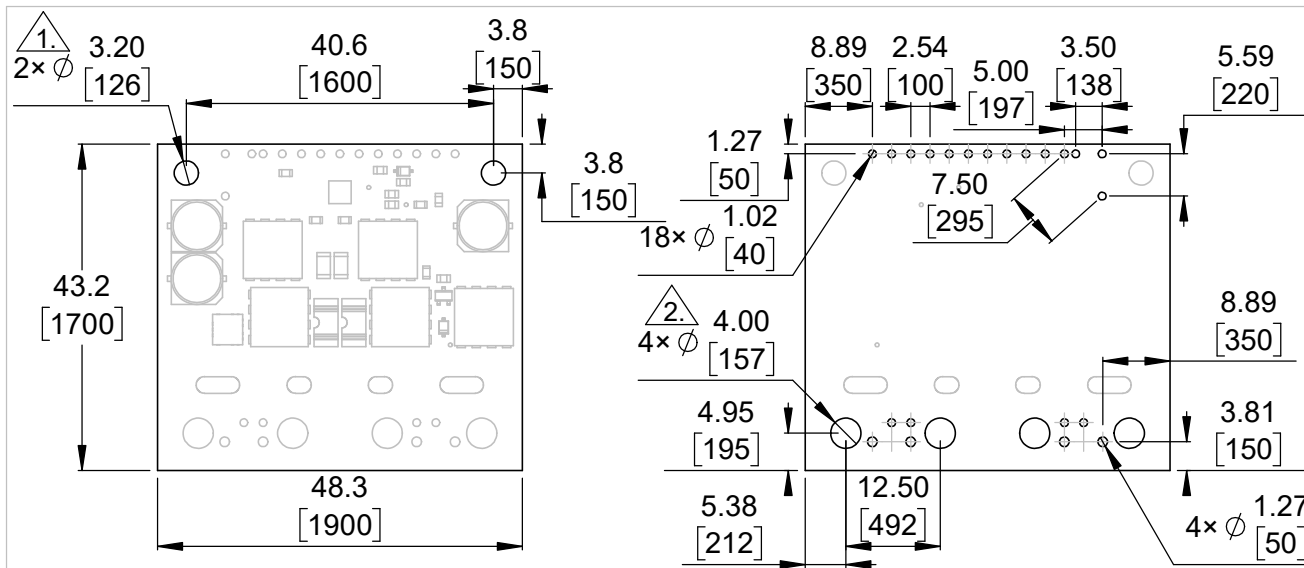

① Board dimensions (top view)
Scale 1:1

② Connector callouts (bottom view)
Scale 1:1

③ Isometric view
Scale 1:1

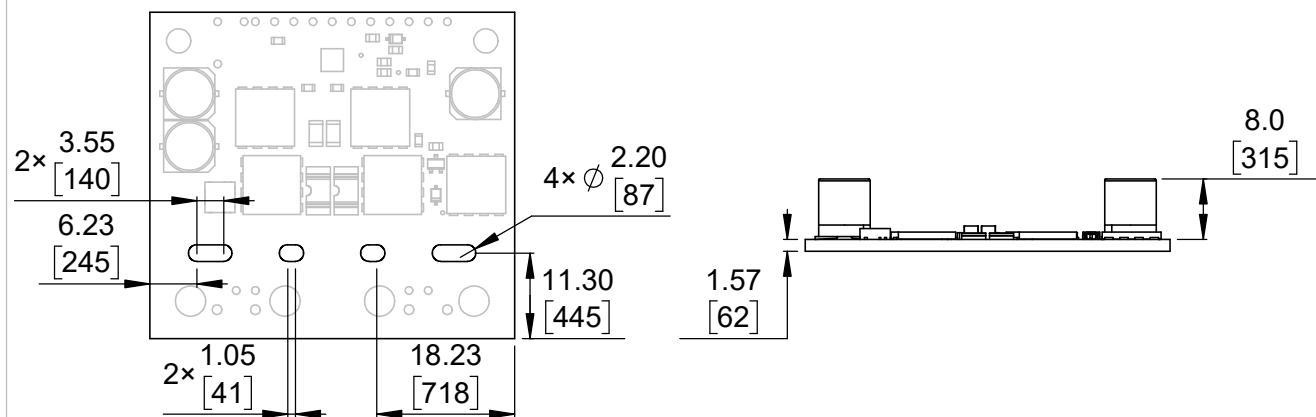

④ Connector callouts (slots) ③
Scale 1:1

⑤ Profile
Scale 1:1

⑥ Actual size
Scale 1:1

- ①. Intended for #4 and M3 screws.
- ②. Intended for #6 and M3.5 screws and 10 AWG or thinner wire.
- ③. Slots intended for 9.5 mm to 12 mm pitch connectors.
4. Grid lines indicate 2.54 mm [100 mil] spacing.
5. To get the specified scale, select 100% in print settings.
6. Drill location tolerance: ± 0.1 [± 5].
7. Board edge tolerance: ± 0.3 [± 10].

<https://www.pololu.com/product/5692>

Name: Pololu G2 High-Power Motor Driver 24v30 CS		Item number: 5692
Drawing date: 12 February 2026	Dev code: md49a	 © 2026 Pololu Corporation
Units: mm [mil]	Material: mixed	